


RFID-Schlüsselanhänger



Schlüsselanhänger KF 10

Specifications KF10


| | |
|-----------------------|-----------------------|
| Size | 45x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |

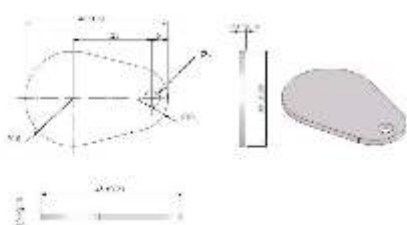

Schlüsselanhänger KF 30 bis KF 34


Specifications KF30 & KF31

| | |
|-----------------------|-----------------------|
| Size | 41x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF32 & KF33

| | |
|-----------------------|-----------------------|
| Size | 41x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF34

| | |
|-----------------------|-----------------------|
| Size | 41x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Schlüsselanhänger KF 50 bis KF 54

Specifications KF51

| | |
|-----------------------|-----------------------|
| Size | 52x25mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF52

| | |
|-----------------------|-----------------------|
| Size | 52x25mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF53

| | |
|-----------------------|-----------------------|
| Size | 60x25mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF54

| | |
|-----------------------|-----------------------|
| Size | 54x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Schlüsselanhänger KF 20 bis KF 24

Specifications KF20

| | |
|-----------------------|-----------------------|
| Size | 26x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF21

| | |
|-----------------------|-----------------------|
| Size | 26x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF22

| | |
|-----------------------|-----------------------|
| Size | 26x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF23

| | |
|-----------------------|-----------------------|
| Size | 26x20mm |
| Thickness | 1,5mm |
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Schlüsselanhänger KF 40 bis KF 44

Specifications KF 41 & 42

| | |
|-----------------------|-----------------------|
| Size | 43,3 x 23,5 mm |
| Thickness | 6mm |
| Operating temperature | -20 °C - +70 °C |
| Storage temperature | -30 °C - +110 °C |
| Material | PC |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF 43

| | |
|-----------------------|-----------------------|
| Size | 43,3 x 30,5 mm |
| Thickness | 6mm |
| Operating temperature | -20 °C - +70 °C |
| Storage temperature | -30 °C - +110 °C |
| Material | PC |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Specifications KF 44

| | |
|-----------------------|-----------------------|
| Size | 47,5 x 31,5 mm |
| Thickness | 5,2 mm |
| Operating temperature | -20 °C - +70 °C |
| Storage temperature | -30 °C - +110 °C |
| Material | PC |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |



Schlüsselanhänger KF 60

Specifications KF60

| | |
|-----------------------|-----------------------|
| Operating temperature | -20°C - +70°C |
| Storage temperature | -30°C - +110°C |
| Material | PVC + Metal protector |
| IP | 67 |
| Available Chips | 125 kHz and 13,56 MHz |

